
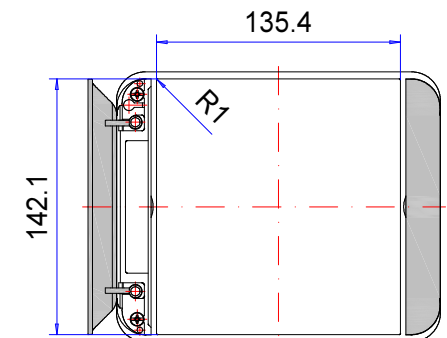
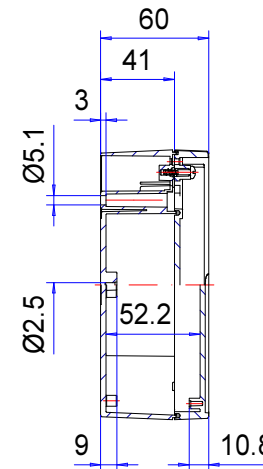
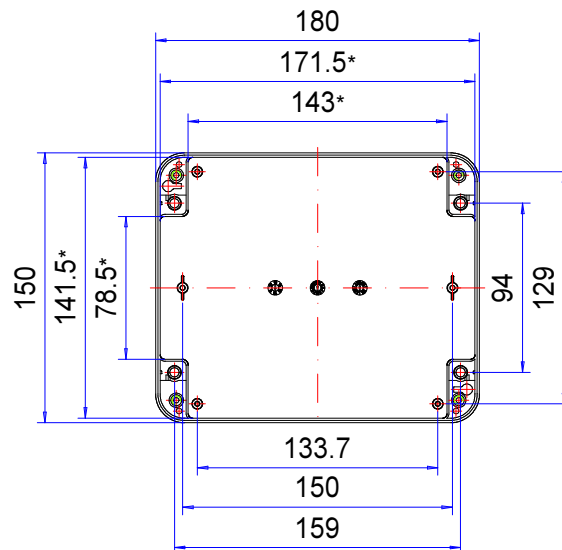
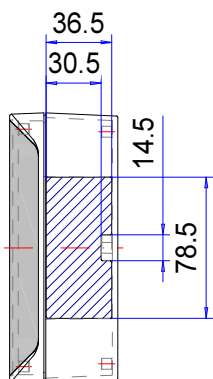
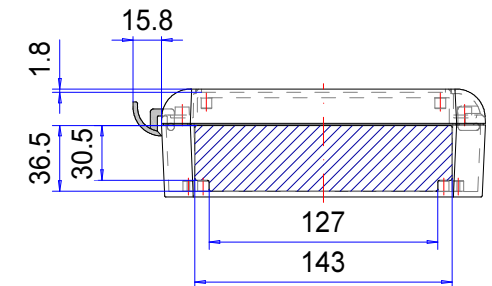


# Enclosure series starCASE

Type: SC 150

Material-No.: 230.150.000

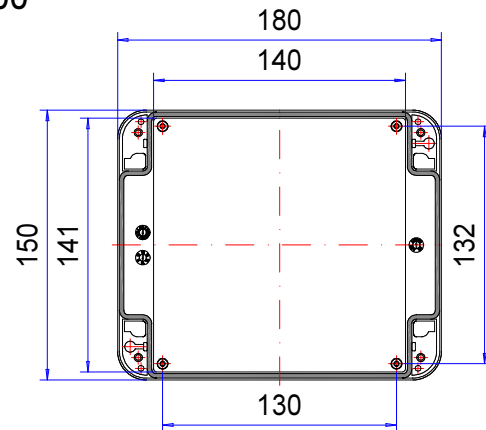

Keypad  
141.9<sup>+0</sup><sub>-0.2</sub> x 135.2<sup>+0</sup><sub>-0.2</sub>

\* Please note: Mould slope for casting ejection, dimensions in the amount of the bottom!

|                    |                                             |                                                                                      |                 |                                               |
|--------------------|---------------------------------------------|--------------------------------------------------------------------------------------|-----------------|-----------------------------------------------|
| Enclosure material | ASA/PC, UL94 V0-1,5mm, RAL 7035, light grey |  | Weight          | 350 g                                         |
| Lid screws         | 4x stainless steel 1.4567 (V2A), captive    |                                                                                      | Assembly screws | 4x KBLØ3x8,5, galvanized steel                |
| Gasket             | 1x moulded gasket, silicone, black          |                                                                                      | Lid supports    | 2x Polypropylen (PP), white                   |
| Ingress protection | IP66 EN 60529                               |                                                                                      | Tolerance       | DIN ISO 16901-130 (outside dimensions ±0.5mm) |
|                    |                                             |                                                                                      |                 |                                               |

technical changes subjected